


UNIQ® FLOW 387 U

Acrylate surface agent

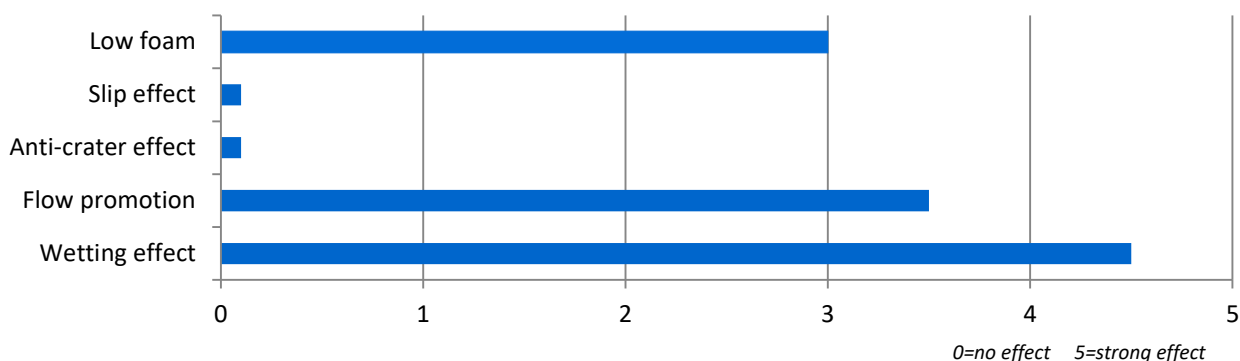

UNIQ® FLOW 387 U is a polyether modified acrylate surface agent, can increase the surface energy of the cured coating and improves the adhesion, wetting and leveling of the following layer such as paint and printing ink. **UNIQ® FLOW 387 U** has no impact on the surface tension of the liquid coating and shows excellent compatibility when it is added to clear coats remaining high transparent.

Special Features

- Suited for water based, solvent based, UV curing and high solid binder systems
- Silicone and fluorine free
- Increase the surface energy of the cured coating
- Improves leveling
- Improves wetting of the cured coatings
- Low foam

Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
Protective coatings	<input checked="" type="checkbox"/>
Industrial coatings	<input checked="" type="checkbox"/>

highly recommended

recommended

Product Specification

Active ingredients	100 %
Density 20°C	1.07 g/ cm ³
Appearance	Light yellow transparent Liquid

Addition levels

Based on total formulation:	
Water based system	0.1 - 1.0 %
Solvent based system	0.5 – 2.0%

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ® FLOW 387 U should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.