


# UNIQ<sup>®</sup>FLOW 389 S

Polyacrylate based leveling agent for solvent based applications

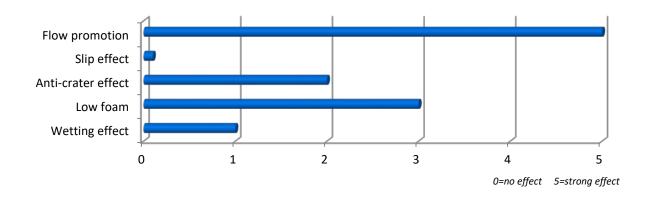

UNIC® FLOW 389 S is a cost effective acrylic leveling agent for solvent based coating systems showing excellent compatibility and good long wave leveling performances. In addition it increases the gloss.

## **Special Features**

- Solvent based applications
- Improves leveling •
- Excellent compatibility
- Suitable for high gloss (clear) coating •
- Does not interfere intercoat adhesion •
- Silicone free
- Solvent free

## Application

| Architectural coatings           |  |
|----------------------------------|--|
| Wood and furniture coatings      |  |
| Automotive and refinish coatings |  |
| Can/coil coatings                |  |
| Protective coatings              |  |
| Industrial coatings              |  |
|                                  |  |

highly recommended recommended

# **Product Specification**

Active ingredients Density 20 °C Color Appearance

100 % 1.088 g/cm<sup>3</sup> Max. 2 colorless sticky liquid

## Packaging

- 25 kg
- 200 kg

## **Addition levels**

Based on total formulation: 0.05 - 0.8 %

## Shelf life

UNIC<sup>®</sup>FLOW 389 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.

UNIQCHEM (UK) CO., LTD

www.uniqchem.com Info@unigchem.com

Regional headquarters

UNIQ<sup>®</sup>FOAM, UNIQ<sup>®</sup>FLOW, UNIQ<sup>®</sup>WET, UNIQ<sup>®</sup>SPERSE, UNIQ<sup>®</sup>LIGHT, UNIQ<sup>®</sup>COLOR, UNIQ<sup>®</sup>MICA, UNIQ<sup>®</sup>CURE, UNIQ<sup>®</sup>JET This information is given to the best of our knowledge. Because of the multitude of formulations, production and appl conditions, all the above mentioned statements have to be adjusted to the circumstances of the processor. No liabilities, including those for patent rights, can be derived from this fact for individual cases. This datasheets replaces all previous issues – Printed in UK © Copyright UNIQCHEM (UK) CO., LTD. Asia: UNIQCHEM Shanghai Co., Ltd. Tel: +86 21 5433 6480 asia@uniqchem.com EMEA:

UNIQCHEM GmbH

Tel: +49 5921 853 7428 eu@uniqchem.com