
UNIQ[®]FLOW 390 S



Polyacrylate leveling agent

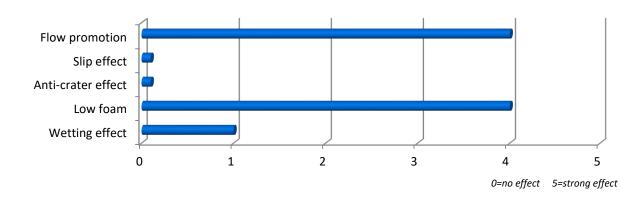

LNIC[®]**FLOW 390 S** is a cost effective polyacrylate leveling agent for solvent based coating systems showing medium level of surface tension reduction and good defoaming performances. **LNIC**[®]**FLOW 390 S** is a silicone free and fluorine free leveling agent, can be applied to solvent borne 1K, 2K and high baking paint systems due to its excellent heat stability performance.

Special Features

- Silicone free and fluorine free
- Good flow
- Showing defoaming performances
- No intercoat adhesion or recoatability issues
- High temperature resistant
- Suited for high baking systems

Application

Architectural coatings	
Wood and furniture coatings	
Automotive and refinish coatings	
Can/coil coatings	
Protective coatings	
Industrial coatings	

highly recommended ■ recommended □

Product Specification

Active ingredients Density 20°C Color Appearance 100 % 1.07 g/ cm³ Max.1 Colorless Transparent Liquid

Packaging

- 25 kg
- 190 kg

Addition levels

Based on total formulation: 0.1 – 1.0 %

Shelf life

LNIC[®]**FLOW 390 S** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.

UNIQCHEM (UK) CO., LTD

www.uniqchem.com

Regional headquarters

 UNIQ®FLOW, UNIQ®KET, UNIQ®SPERSE, UNIQ®LIGHT, UNIQ®COLOR, UNIQ®MICA, UNIQ®CURE, UNIQ®JET

 This information is given to the best of our knowledge. Because of the multitude of formulations, production and application conditions, all the above mentioned statements have to be adjusted to the circumstances of the processor.

 No liabilities, including those for patent rights, can be derived from this fact for individual cases.

 This datasheets replaces all previous issues – Printed in UK

 © Copyright UNIQCHEM (UK) CO., LTD.
 Asia:

 Asia:
 UNIQCHEM Shanghai Co., Ltd.
 Tel: +86 21 5433 6480

 EMEA:
 UNIQCHEM GmbH
 Tel: +49 5921 853 7428