


UNIQ[®] FLOW 393 S

Modified polyester leveling agent

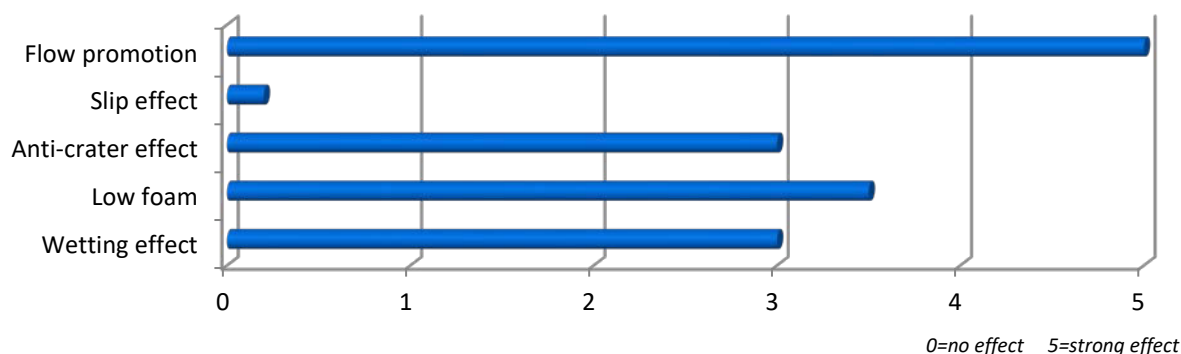

UNIQ[®] FLOW 393 S is modified polyester leveling agents to be used in solvent based coating system. Shows excellent compatibility with most of the resins. It shows the good fast wetting and leveling and strong defoaming performances, It will improve DOI and fullness. it shows good performance in automotive and industrial coating

Special Features

- Solvent base application
- Excellent flow and leveling
- No intercoat adhesion problem
- Good anti-crater
- Good substrate wetting
- Wide compatibility
- Silicone free
- Heat stable

Application

| | |
|----------------------------------|-------------------------------------|
| Architectural coatings | <input type="checkbox"/> |
| Wood and furniture coatings | <input type="checkbox"/> |
| Automotive and refinish coatings | <input checked="" type="checkbox"/> |
| Can/coil coatings | <input checked="" type="checkbox"/> |
| Protective coatings | <input checked="" type="checkbox"/> |
| Industrial coatings | <input checked="" type="checkbox"/> |

highly recommended
recommended

Product Specification

| | |
|--------------------|--|
| Active ingredients | 50 % |
| Solvent | PMA |
| Density 20 °C | 1.02 g/cm ³ |
| Color | Max. 2 |
| Appearance | Clear colorless to slight yellowish liquid |

Addition levels

- Based on total formulation: 0.1 – 1.5 %

Packaging

- 25 kg
- 200 kg

Shelf life

UNIQ[®] FLOW 393 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.