


UNIQ[®] FOAM 154 S

Non-silicone defoamer

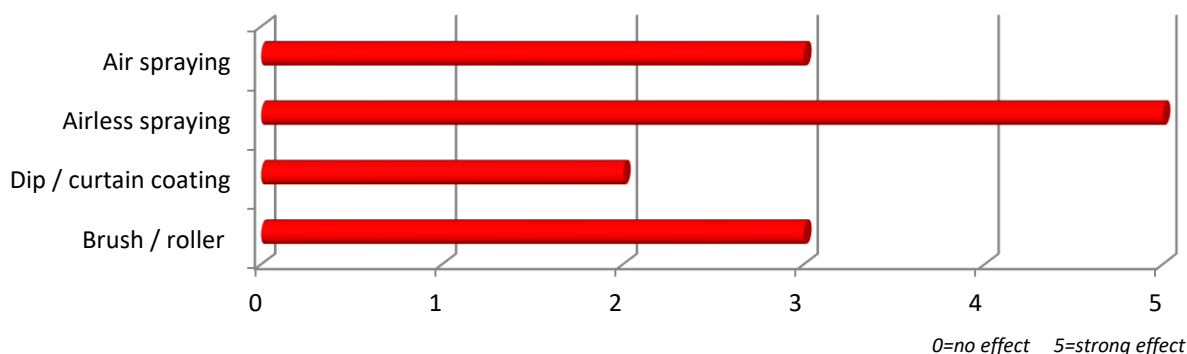

UNIQ[®] FOAM 154 S is a silicone free defoamer, is recommended to solvent based and solvent free coatings. It is particularly suitable for solvent free PUR and epoxy coating systems. Due to its excellent antifoaming and defoaming properties, it can prevent surface defects like pinholing and popping. When used in clear coat system, please check the compatibility for effecting the transparency.

Special Features

- Solvent based and solvent free applications
- Excellent antifoam and defoaming
- No effect to intercoat adhesion
- Silicone free
- High temperature resistant

Application

| | |
|----------------------------------|-------------------------------------|
| Architectural coatings | <input type="checkbox"/> |
| Wood and furniture coatings | <input type="checkbox"/> |
| Automotive and refinish coatings | <input type="checkbox"/> |
| Coil coatings | <input checked="" type="checkbox"/> |
| Can coating | <input type="checkbox"/> |
| Industrial coatings | <input checked="" type="checkbox"/> |
| Protective coatings | <input checked="" type="checkbox"/> |

highly recommended
recommended

Product Specification

Density 20°C
Color
Appearance

0.77 g/cm³
Max. 2
Clear transparency
liquid

Addition levels

- Based on total formulation: 0.1 – 1.0 %

Due to its slight incompatibility, the influence upon the transparency in clear systems or other surface defects must be evaluated.

Packaging

- 20 kg
- 145 kg

Shelf life

UNIQ[®] FOAM 154 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.