


UNIQ[®] FOAM P-599

Solution of non-silicone defoaming polymers

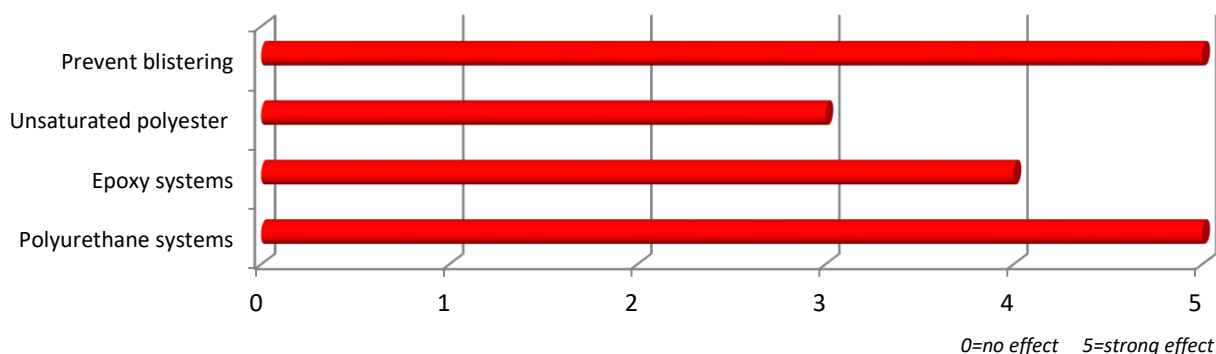

UNIQ[®] FOAM P-599 is a strong anti-foam and air-release agent especially suitable for unsaturated polyester resin, ambient-curing plastic systems, adhesives and sealants, especially for polyurethane based resin systems. The additive furthermore helps to avoid pinholing or popping.

Special Features

- Quick de-aeration and defoaming effect
- Does not interfere intercoat adhesion
- Silicone-free
- Heat stable

Application

| | |
|-----------------------------|-------------------------------------|
| Unsaturated polyester resin | <input type="checkbox"/> |
| Adhesives and sealants | |
| Epoxy based | <input checked="" type="checkbox"/> |
| PU based | <input checked="" type="checkbox"/> |
| Ambient curing plastic | |
| Epoxy based | <input checked="" type="checkbox"/> |
| PU based | <input checked="" type="checkbox"/> |

highly recommended
recommended

Product Specification

| | |
|-------------------|------------------------|
| Active ingredient | 100 % |
| Density 20°C | 0.82 g/cm ³ |
| Appearance | Colorless clear liquid |

Addition levels

- Based on total formulation: 0.1 – 1.0 %
Added in grinding stage or under high shear forces incorporation.

Packaging

- 20 kg
- 150 kg

Shelf life

UNIQ[®] FOAM P-599 should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.